



Triade Pro System


WOOD
AND
GLASS
SHELVING
SYSTEMS





SYMBOLS AND FINISHES LEGEND

SYMBOLS



= SHELF SAFELY LOCKED DURING
TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= WITH BUFFER



= PART NO.



= BLADE SLOT



= WITH MAGNET



= PCS. PER PACKAGE



= COMBI SLOT



= HEXAGONAL SOCKET



= NEWTON



= CAPACITY LOADING



= HEXALOBULAR SOCKET



= FRICTION



= WOOD / GLASS
THICKNESS



= COUNTERSUNK HEAD



= AUTOMATIC



= HOLE DIAMETER



= PAN HEAD



= DROP DOWN



= DIAMETER



= FLANGE HEAD



= LENGTH



= FLAT HEAD



= STANDARD HINGE



= HEIGHT



= TRILOBULAR SCREW



= KIMANA HINGE



= RIGHT VERSION



= SELF-TAPPING SCREW



= FLAP HINGE



= LEFT VERSION



= EURO THREAD



= WITH SPRING



= SETTING CODE



= METRIC THREAD



= WITHOUT SPRING



= PCS. PER PAD



= PRE-INSERTED SCREW



= REVERSED SPRING



= CUT ON REQUEST



= PRE-INSERTED SCREW
AND SPREADING BUSH



= SELF ADHESIVE



= WITH FLANGE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accuracy. We reserve the right to alter specifications without notice.

MATERIALS

ZA = Zinc Alloy

ST = Steel

HSS = High Speed Steel

BR = Brass

ABS = Acrylonitrile Butadiene Styrene

ZAnk = Nickel-plated Zinc Alloy

STzk = Zinc-plated Steel

AL = Aluminium

WD = Wood

EVA = Ethylene Vinyl Acetate

EP = **ENGINEERING PLASTIC**

+ **EP** = other engineering plastic available on request

SR = **SOFT RUBBER**

+ **SR** = other soft rubber available on request

EPn = Natural Engineering Plastic

EPc = Clear Engineering Plastic

SRn = Natural Soft Rubber

EPw = White Engineering Plastic

EPg = Grey Engineering Plastic

SRw = White Soft Rubber

EPwg = Water Green Engineering Plastic

EPa = Anthracite Engineering Plastic

SRb = Black Soft Rubber




FINISHES



+ = OTHER FINISHES AVAILABLE ON REQUEST

PART NO.	FINISHES	PART NO.	FINISHES	PART NO.	FINISHES
00	Insignificant finish	IF	Middle Grey	RO	Red
AA	Natural	IJ	Light Grey	UT	T-Met 9007
AB	White	IL	Grey 20	UZ	T-Met
AE	White 9010	IN	Grey met. 26	WA	Bronzed
EA	Black	JB	Bright Aluminium	WI	Burnished
EC	Matt Black	JC	Aluminium - Chrome	XD	Satin-finished Steel
EE	Anthracite	JD	Matt Aluminium	YA	Nickel-plated
EW	Grey 9007	JE	Satin-finished Aluminium	YB	Bright Nickel-plated
FU	Gunmetal	JF	Aluminium - Brass	YC	Matt Nickel-plated
FV	Gunmetal V52	JG	Aluminium 5	YD	Satin-finished Nickel-plated
GR	Raw	JL	Aluminium PE 11	YQ	Black Nickel
HA	Brass-Plated	JM	Aluminium RAL 9006	Z9	Black Zinc
HH	Tropicalized	KA	Chrome	ZA	Zinc alloy
HL	Raw Brass	KB	Bright Chrome	ZN	Zinc-plated
HX	Graphite	KC	Matt Chrome	ZQ	Bright Gold
IA	Grey	LD	Brown 8019	ZY	Titanium
IB	Metallic Grey	NN	Metallic Beige	ZZ	Clear

TRIADE PRO MINI

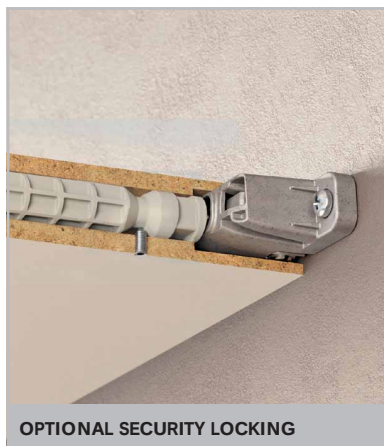


25 mm min.



15 kg per pair for shelf 250 mm deep




SPECIFICATION

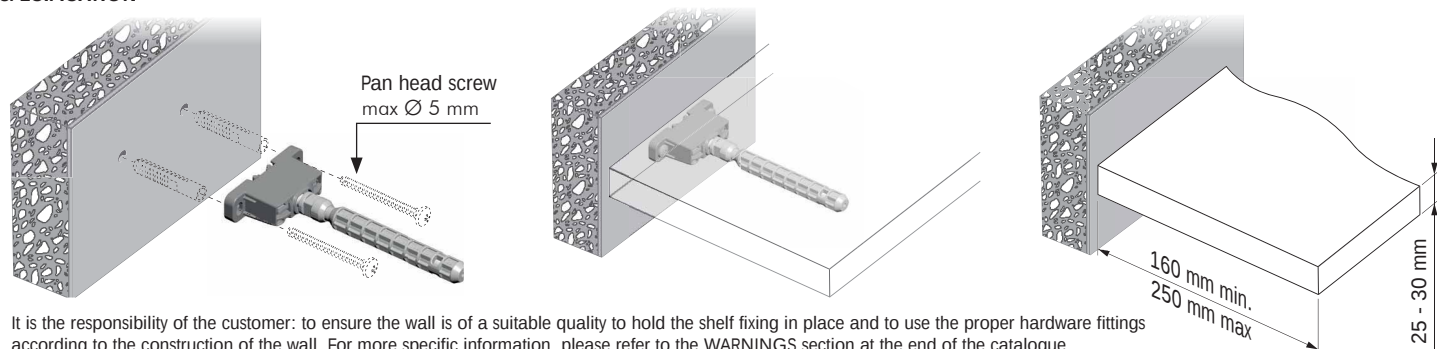


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

ADJUSTMENT

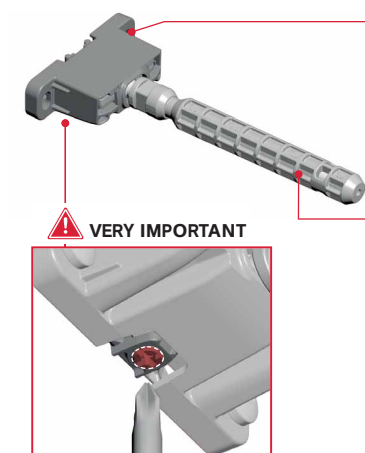


Screw to lock when adjustments are finished.





BRACKET ALIGNMENT



LATERAL ADJUSTMENT





INCLINATION ADJUSTMENT

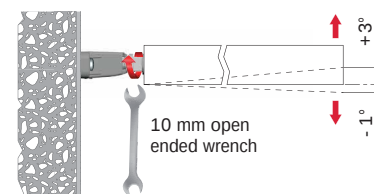



CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

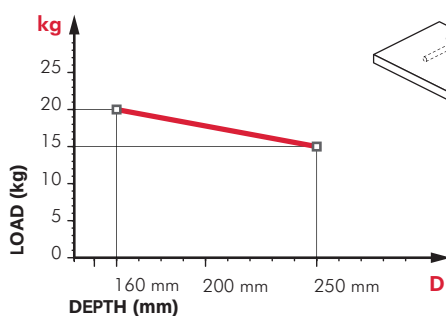


RECOMMENDED NUMBER OF TRIADE PRO MINI PER SHELF

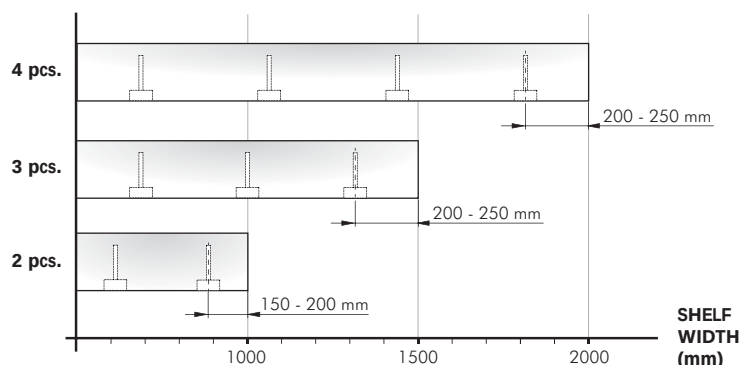


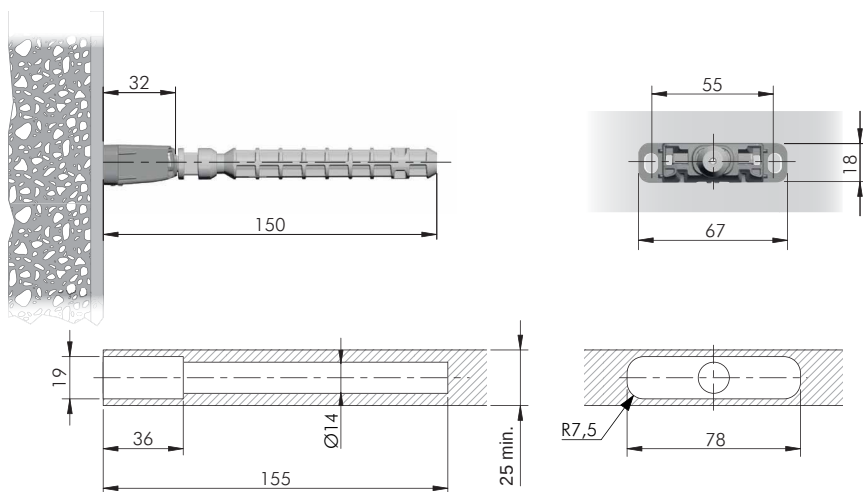


= PZ2	= open ended wrench 10 mm
ZA ST	= 50 pcs.
123	
1623001000	



OPTIONAL DRILLING FOR SECURITY LOCKING

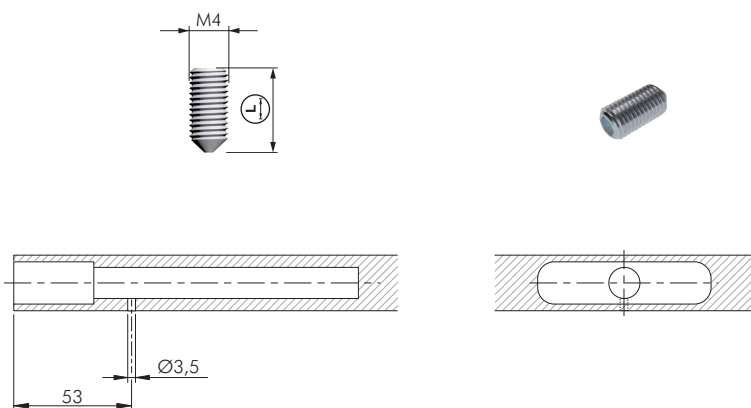



= S2	= 100 pcs.	
ST		
123		
21105170ZN	8	25
21105180ZN	10	30

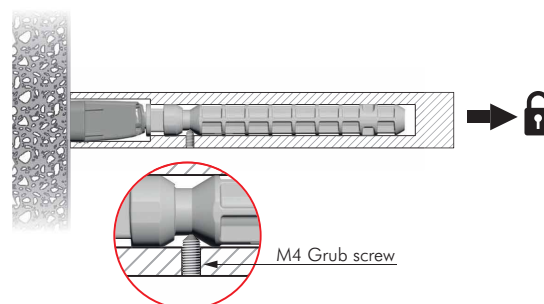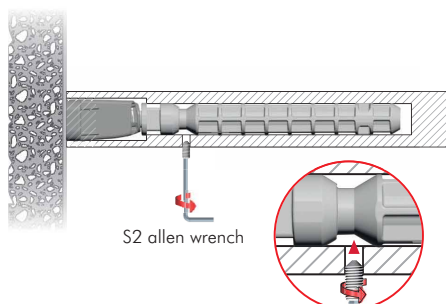

TRIADE PRO MINI AND BRACKET

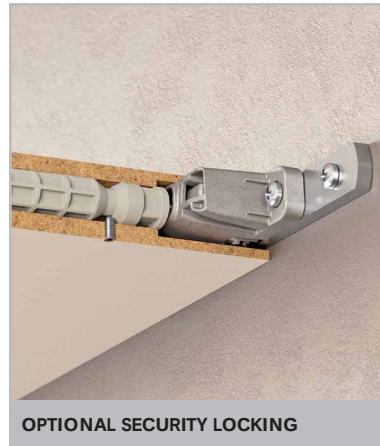
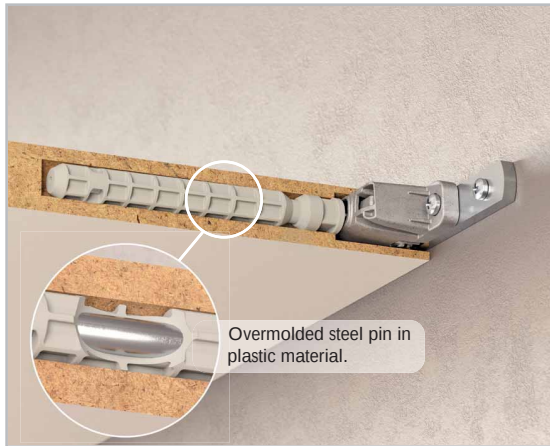


25 mm min.

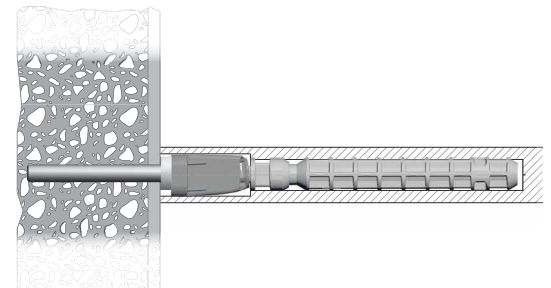
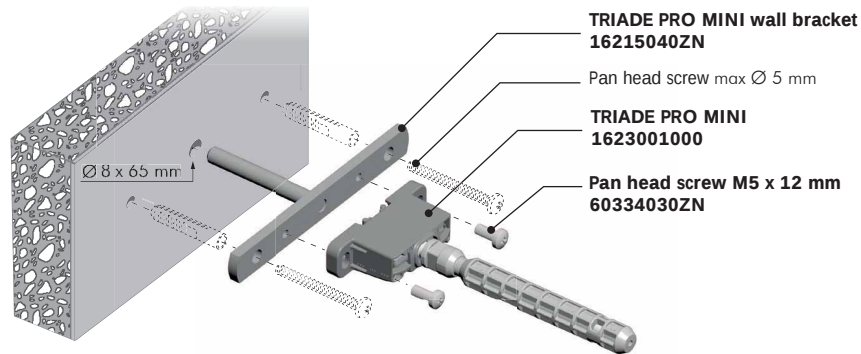


The wall bracket guarantees a more stable fixing to the wall.



It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

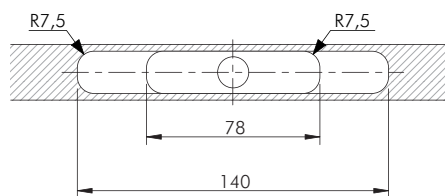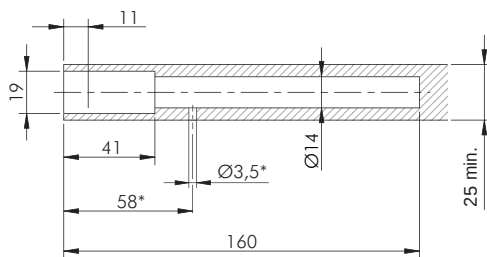

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Mini section.

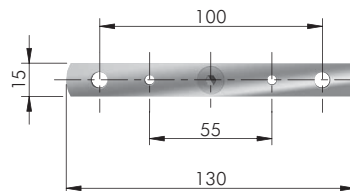


FIXING ACCESSORY

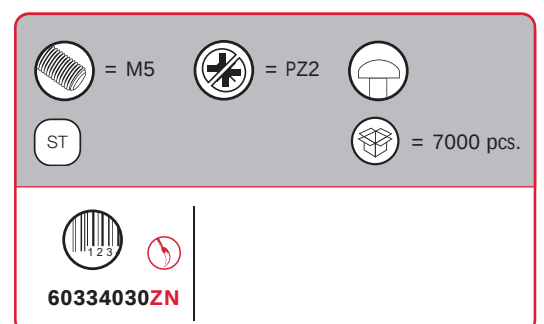






TRIADE PRO

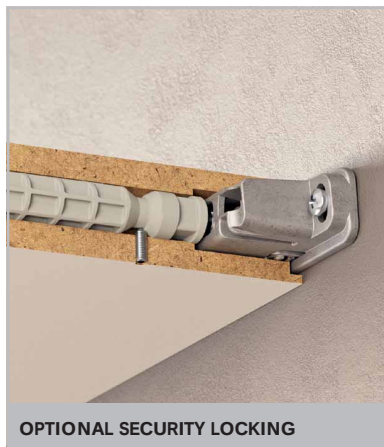

30-40 mm


30 kg per pair for shelf 300 mm deep

SPECIFICATION

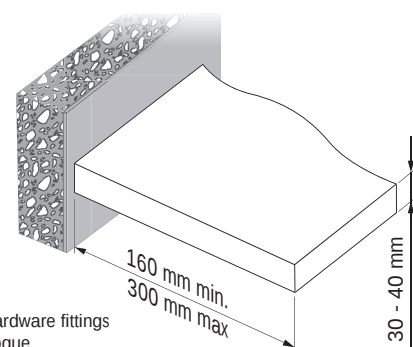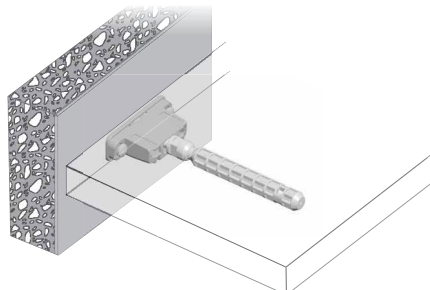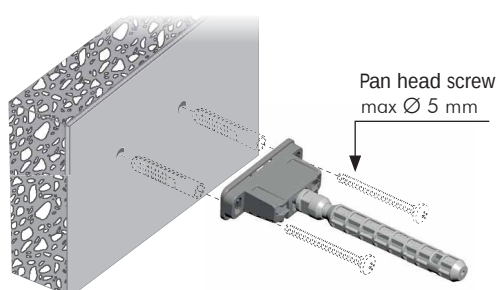


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

ADJUSTMENT




Screw to lock when adjustments are finished.





BRACKET ALIGNMENT



LATERAL ADJUSTMENT




INCLINATION ADJUSTMENT

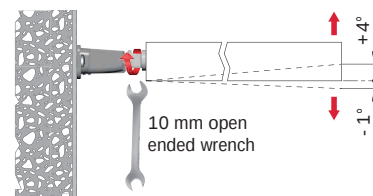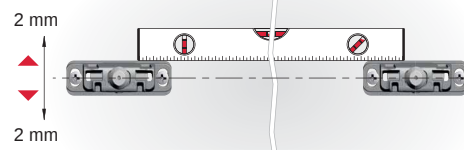






CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

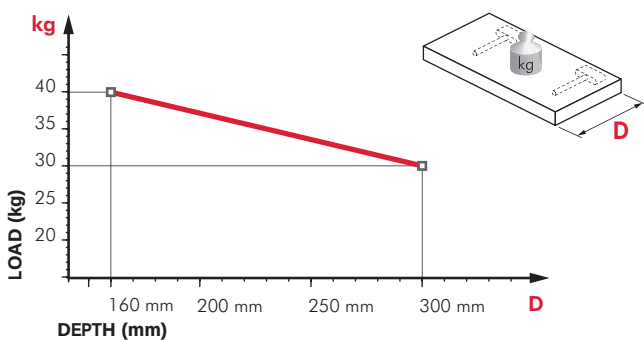

RECOMMENDED NUMBER OF TRIADE PRO PER SHELF

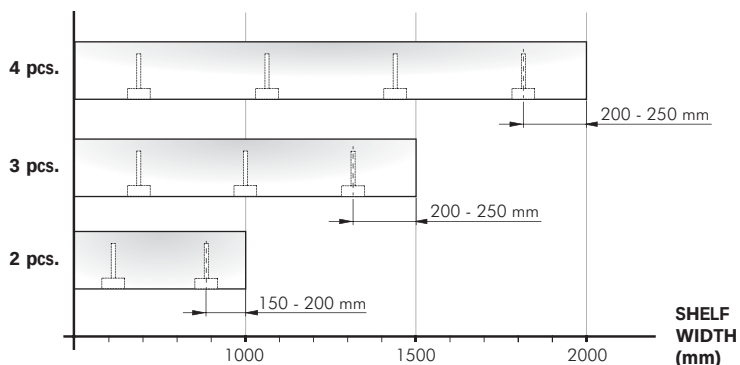

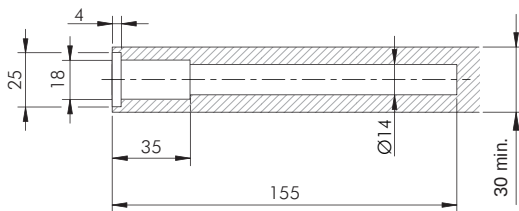

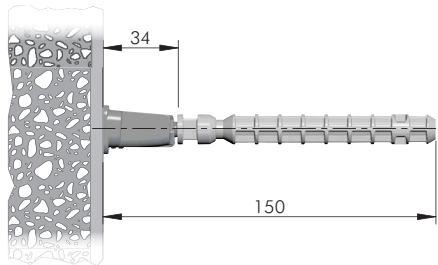


= PZ2
 = open ended wrench 10 mm
 = 50 pcs.

123

1623002000



OPTIONAL DRILLING FOR SECURITY LOCKING

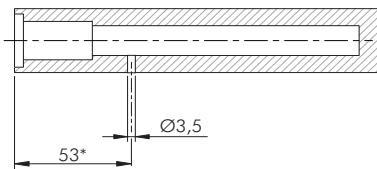

= S2
 = 100 pcs.

123

21105180ZN	10	30
21105220ZN	16	40

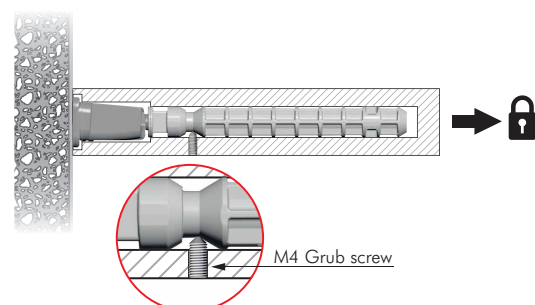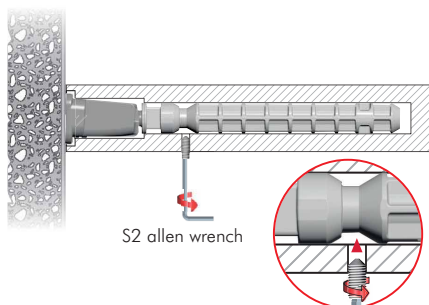





TRIADE PRO AND BRACKET



Overmolded steel pin in plastic material.

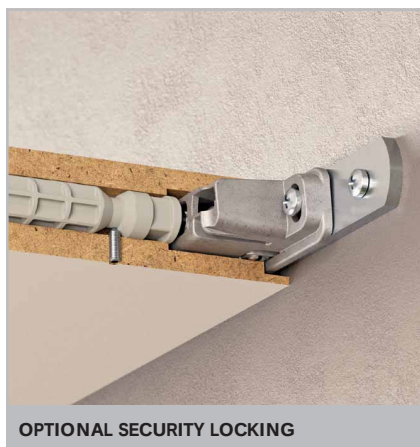

OPTIONAL SECURITY LOCKING

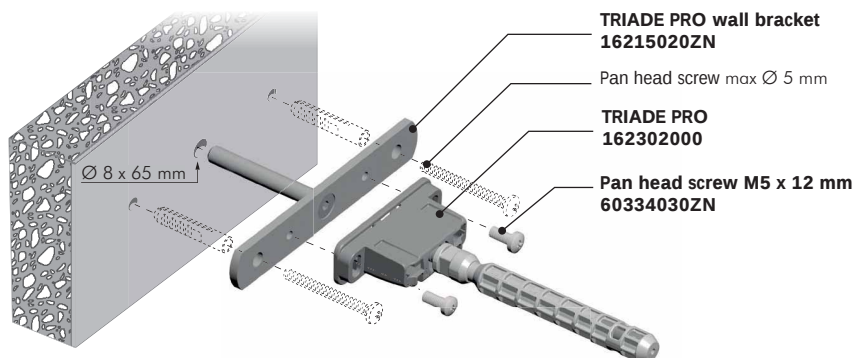


TRIADE PRO wall bracket
16215020ZN

Pan head screw max Ø 5 mm



TRIADE PRO
162302000

Pan head screw M5 x 12 mm
60334030ZN


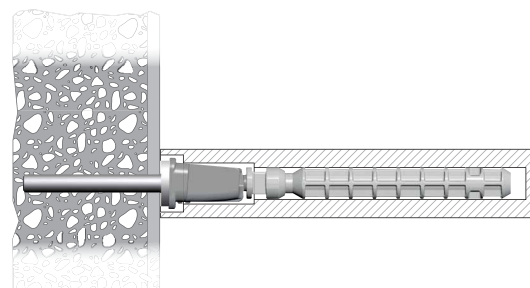


The wall bracket guarantees a more stable fixing to the wall.


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

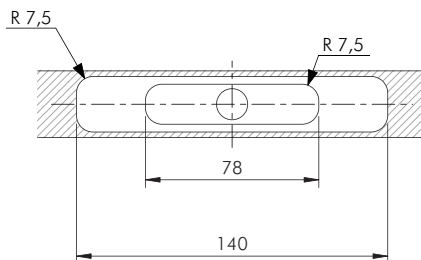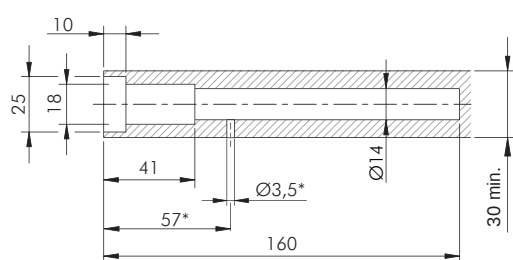

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro section.

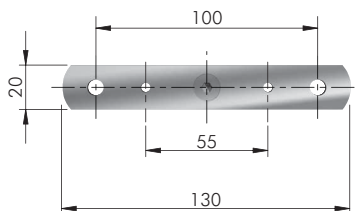

FIXING ACCESSORY



ST

100 pcs.



16215020ZN



= M5



= PZ2




7000 pcs.

ST



60334030ZN

TRIADE PRO MAXI

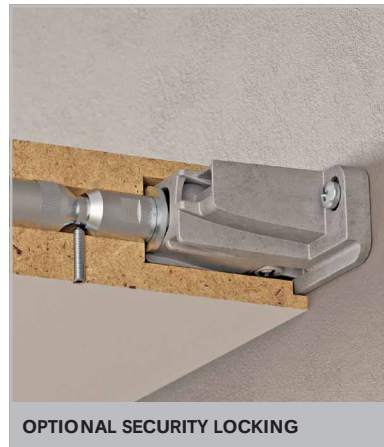




40 mm min.



30 kg per pair for shelf 400 mm deep




SPECIFICATION

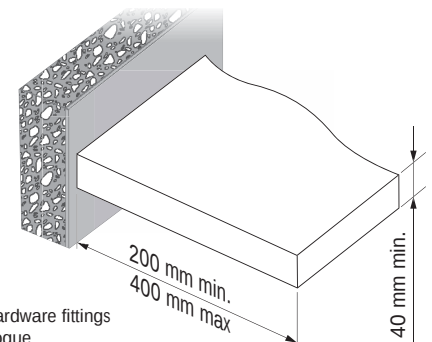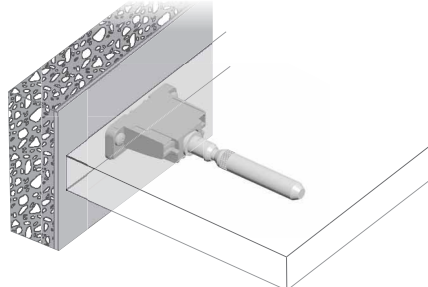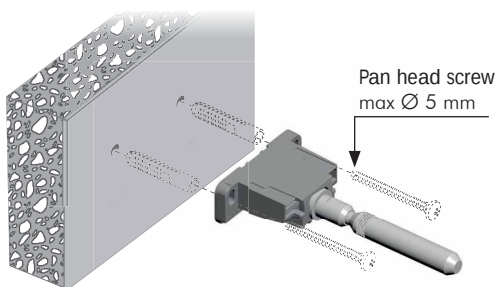

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

ADJUSTMENT




VERY IMPORTANT




Screw to lock when
adjustments are finished.





BRACKET ALIGNMENT



LATERAL ADJUSTMENT




INCLINATION ADJUSTMENT

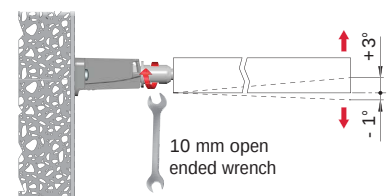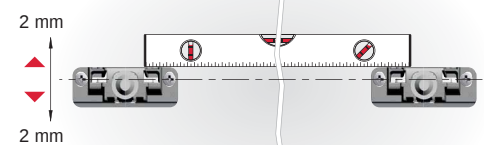


CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

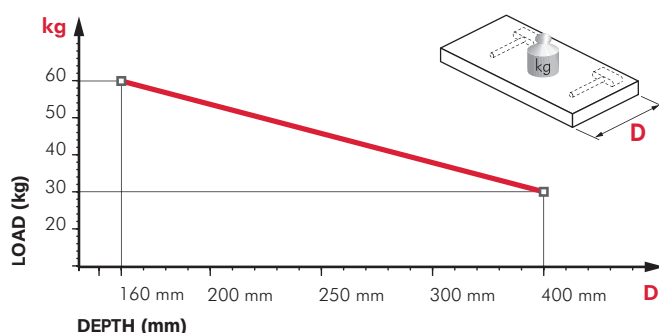




RECOMMENDED NUMBER OF TRIADE PRO MAXI PER SHELF

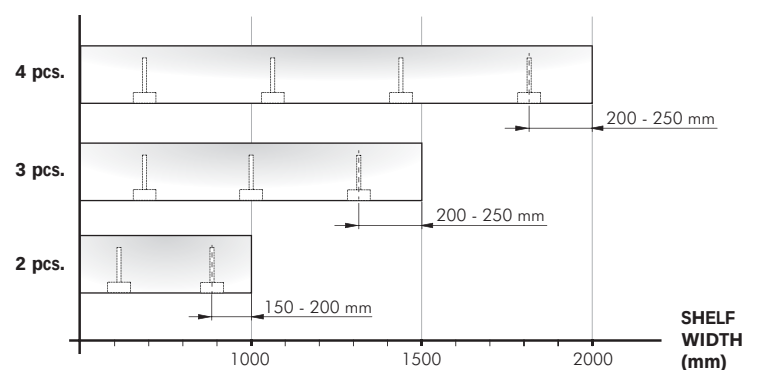



VERY IMPORTANT

Centre of the hole is shifted 3,5 mm upwards. Please keep in mind when levelling the shelf.

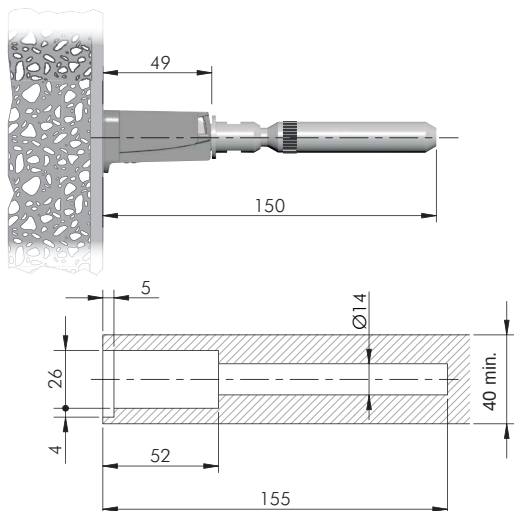

= PZ2



= open ended wrench 12 mm






= 50 pcs.



P210524100

OPTIONAL DRILLING FOR SECURITY LOCKING

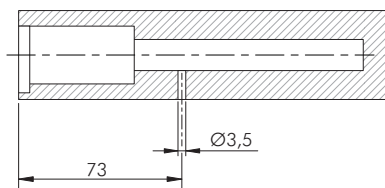

= S2



= 100 pcs.



21105220ZN



16




40


21105060ZN

20

50

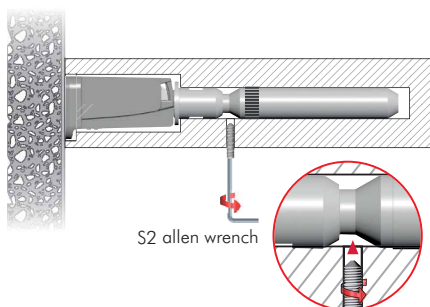




S2 allen wrench

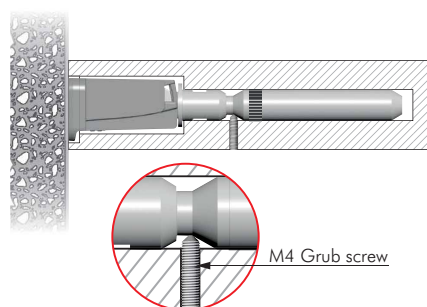

M4 Grub screw





TRIADE PRO MAXI AND BRACKET

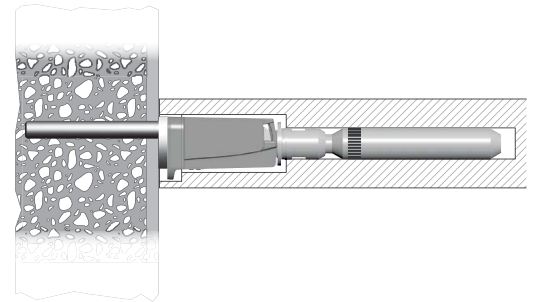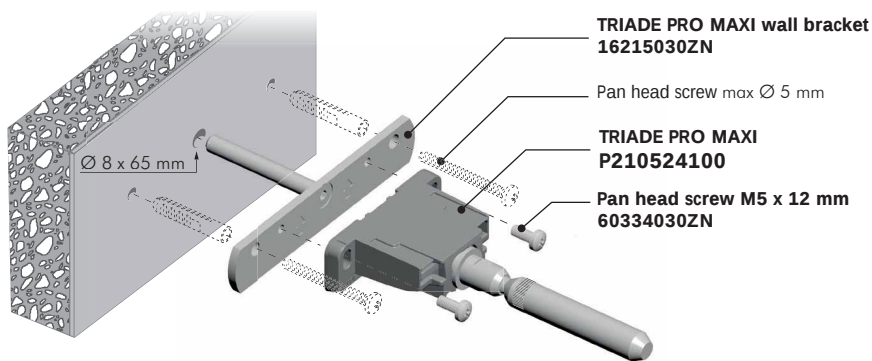
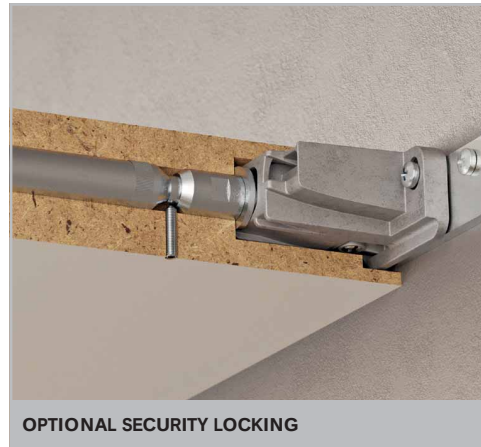


The wall bracket guarantees a more stable fixing to the wall.


It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

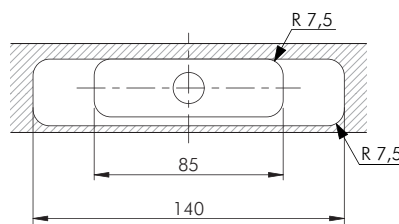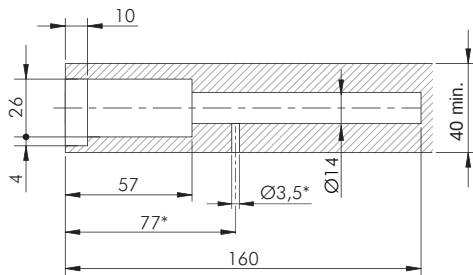

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Maxi section.

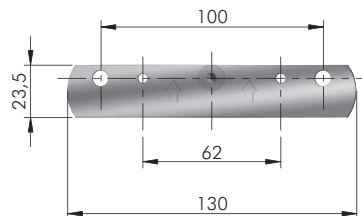

FIXING ACCESSORY



ST

☐ = 100 pcs.



16215030ZN



ST



☐ = 7000 pcs.



60334030ZN



TRIADE PRO XXL

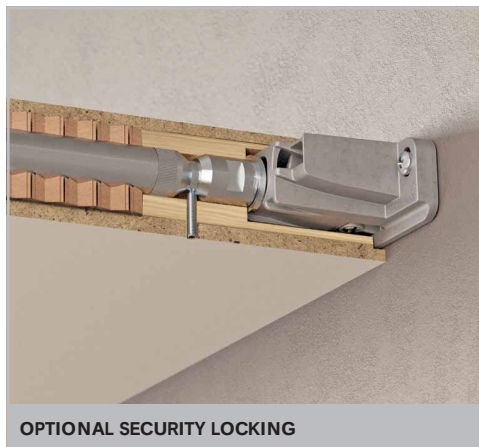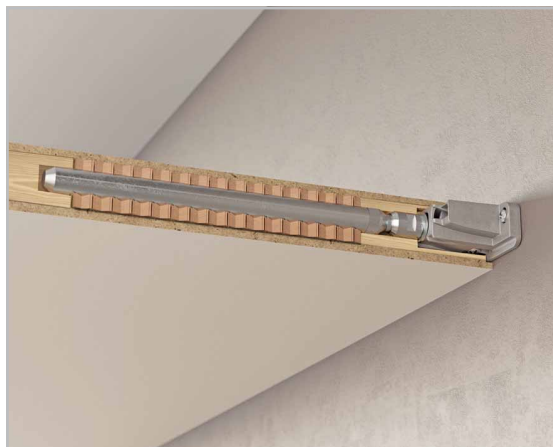




40 mm min.



40 kg per pair
for shelf 400 mm deep




SPECIFICATION

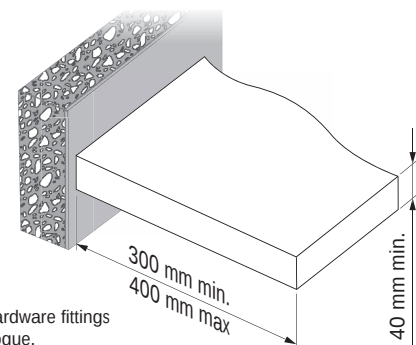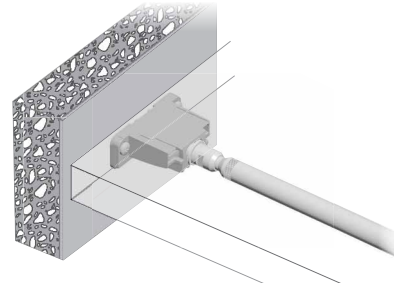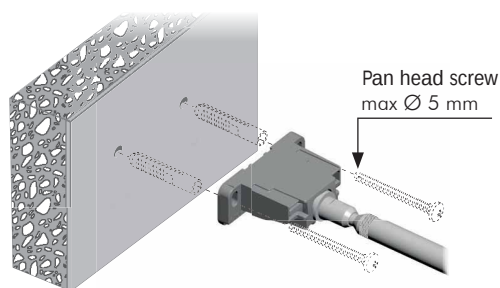

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.


ADJUSTMENT

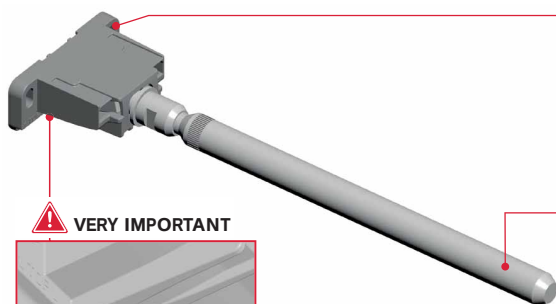


VERY IMPORTANT

Screw to lock when
adjustments are finished.





BRACKET ALIGNMENT



LATERAL ADJUSTMENT




INCLINATION ADJUSTMENT

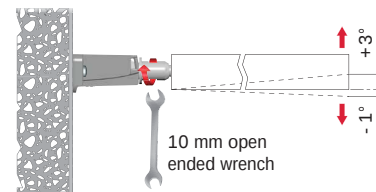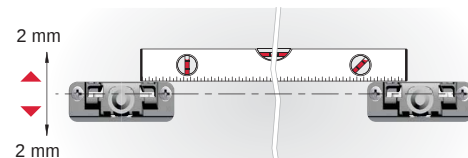


CAPACITY LOADING CHART

(The figures refer to 2 shelf supports)

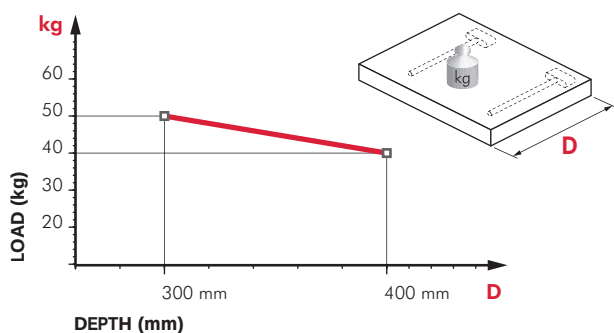

RECOMMENDED NUMBER OF TRIADE PRO XXL PER SHELF

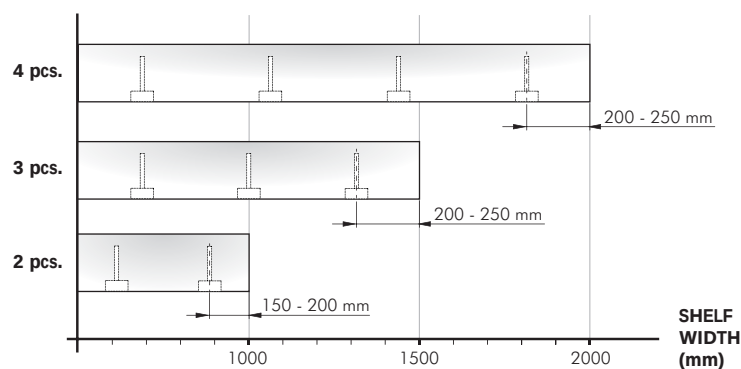



= PZ2



= open ended
wrench 12 mm

ZA



ST




= 25 pcs.






P220203000

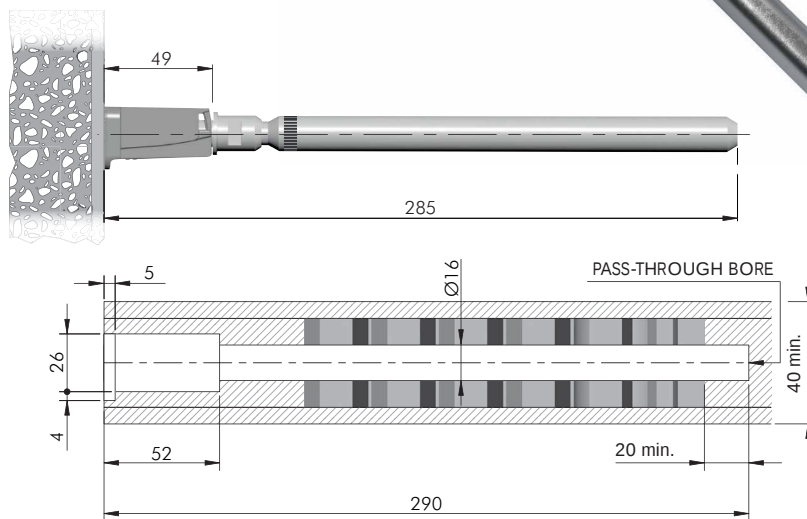

VERY IMPORTANT
Centre of the hole is
shifted 3,5 mm upwards.
Please keep in mind when
levelling the shelf.



OPTIONAL DRILLING FOR SECURITY LOCKING

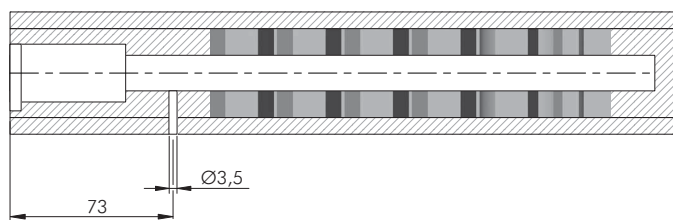

= S2

ST



= 100 pcs.



21105190ZN



14




40


21105060ZN

20

50

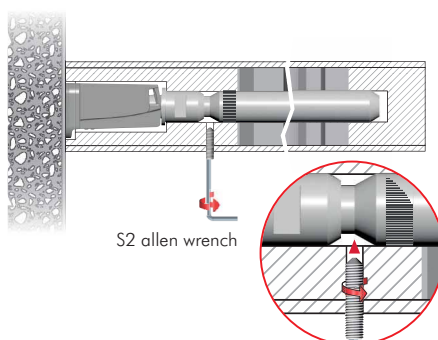

S2 allen wrench




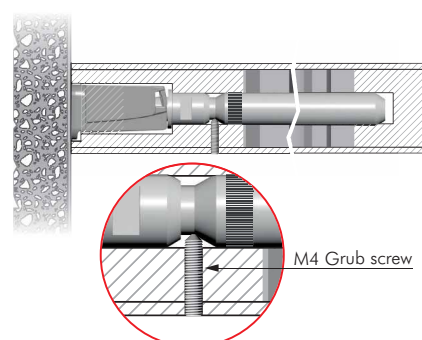


M4 Grub screw








TRIADE PRO XXL AND BRACKET

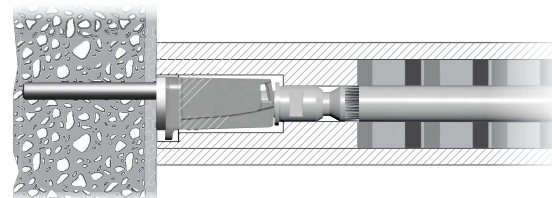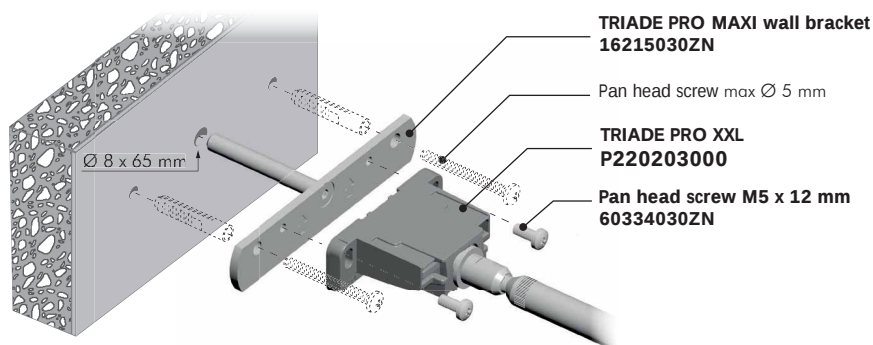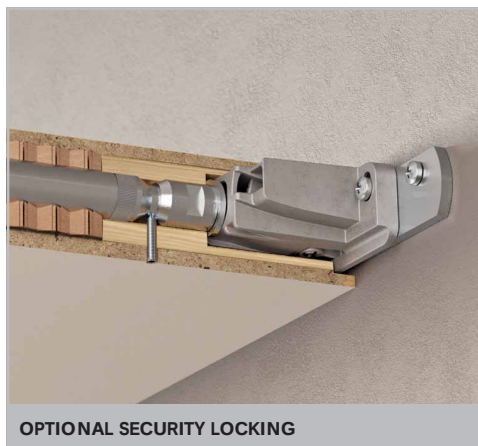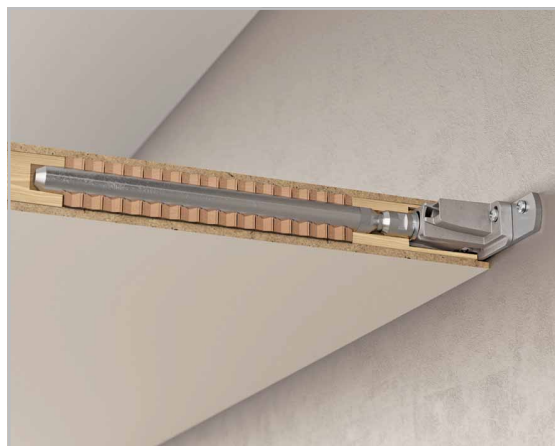



It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

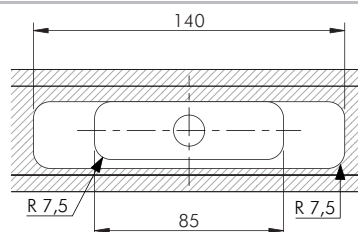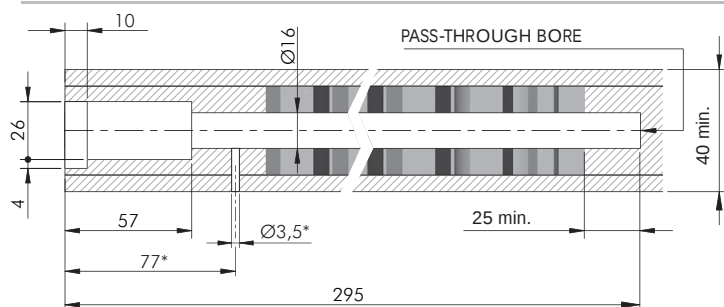



* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro XXL section.

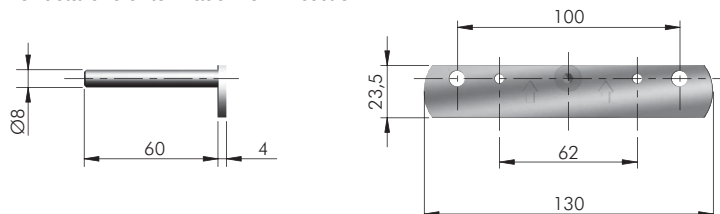

FIXING ACCESSORY

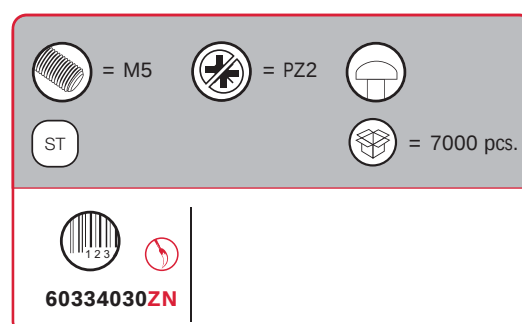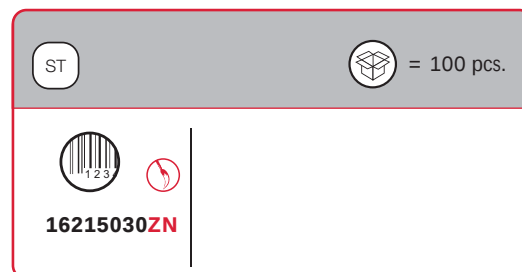


TRIADE PRO AND TRIADE PRO MINI ALUMINIUM PROFILES

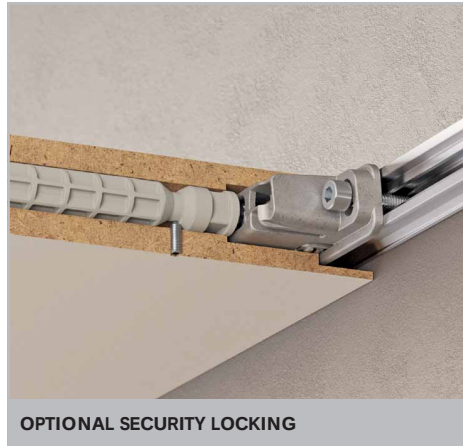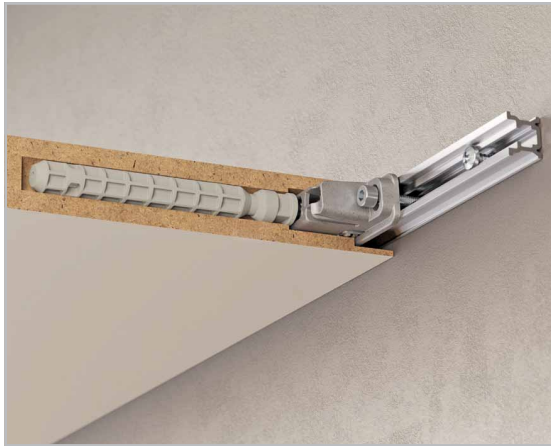


ALUMINIUM PROFILE DRILLING





DRILLING DETAILS

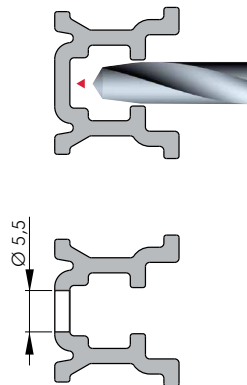

TRIADE PRO INSERTION INTO THE ALUMINIUM PROFILE

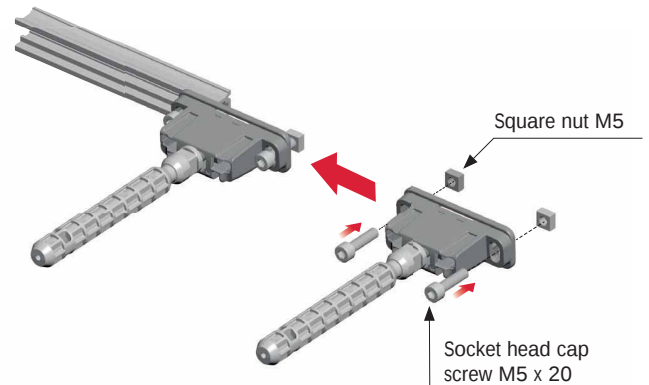


INSTALLATION ON THE WALL AND SHELF INSERTING

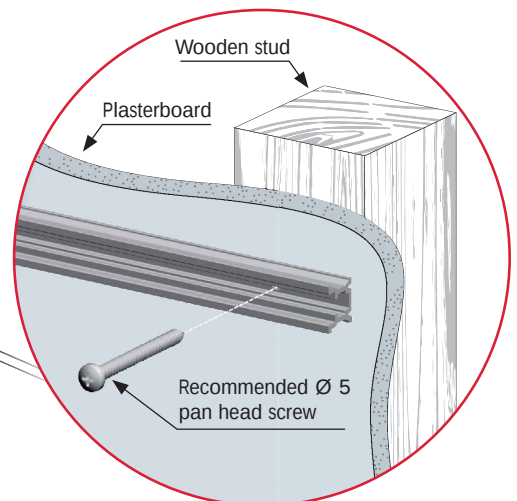
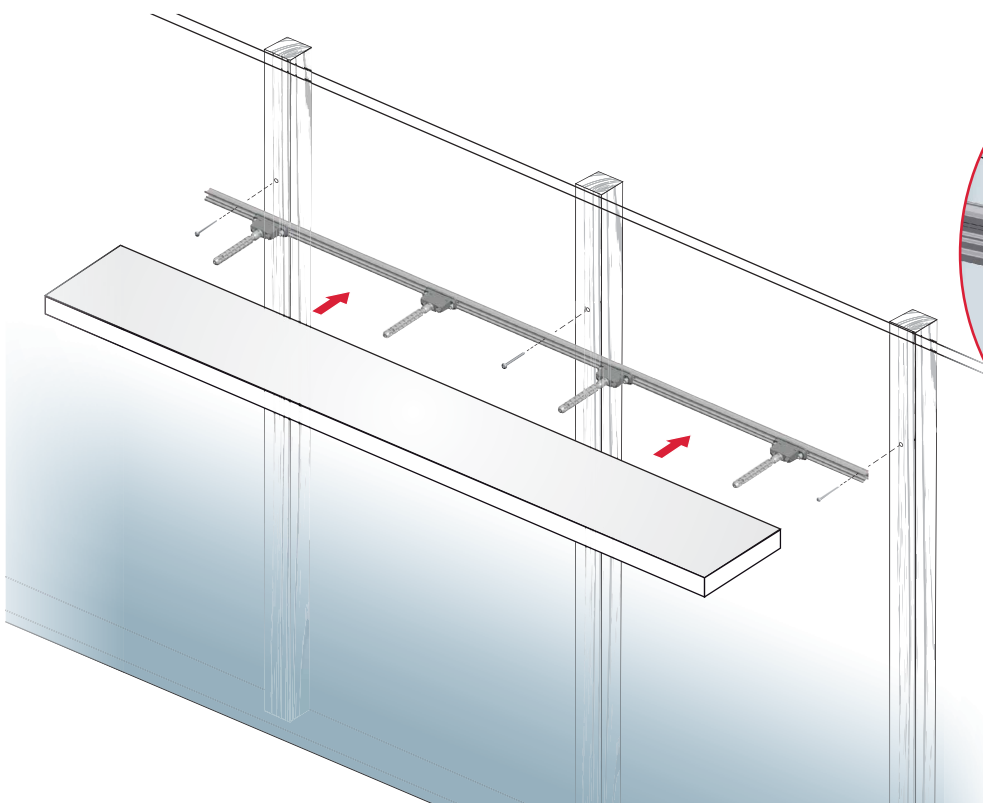






TRIADE PRO MINI AND TRIADE PRO ALUMINIUM PROFILE

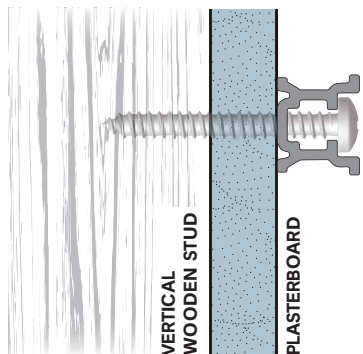

AL	= 24 pcs.
6902400000	
Further profile lengths available on request.	


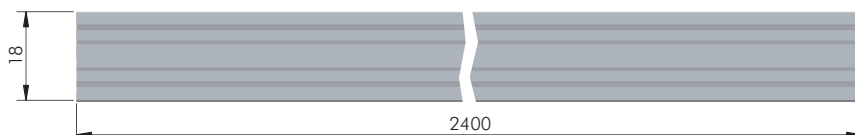


DRILLING PLAN FOR THE APPLICATION WITH TRIADE PRO MINI

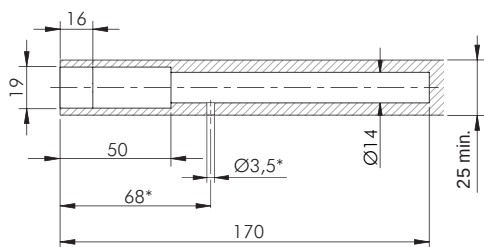


* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Mini section.

DRILLING PLAN FOR THE APPLICATION WITH TRIADE PRO

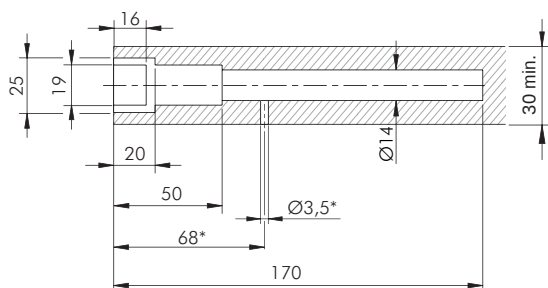

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro section.


ACCESSORY TO FIX ALL TRIADE PRO VERSIONS TO ALU PROFILES

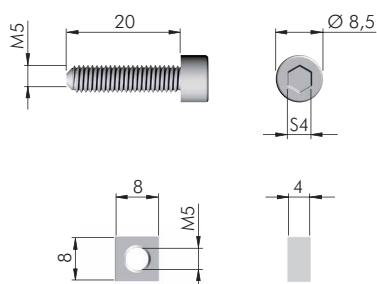


ST	= on request
C010001328	

NOTE: Set of 4 x Square nuts and 4 x Socket-head cap screws.


TRIADE PRO MAXI AND XXL ALUMINIUM PROFILES

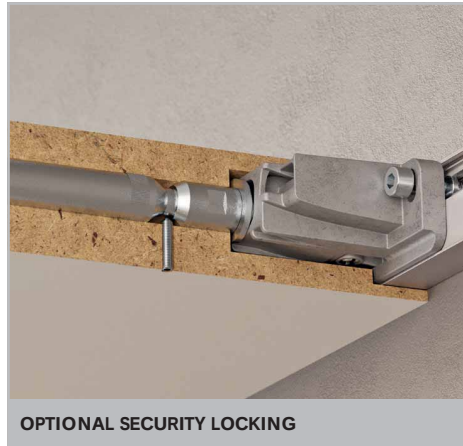


ALUMINIUM PROFILE DRILLING





DRILLING DETAILS

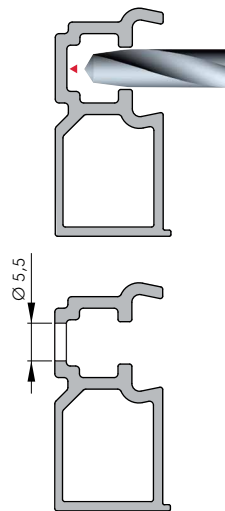

TRIADE INSERTION INTO THE ALUMINIUM PROFILE

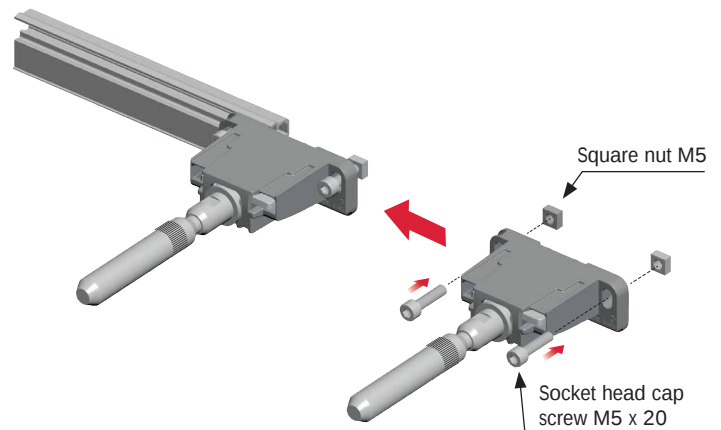


INSTALLATION ON THE WALL AND SHELF INSERTING

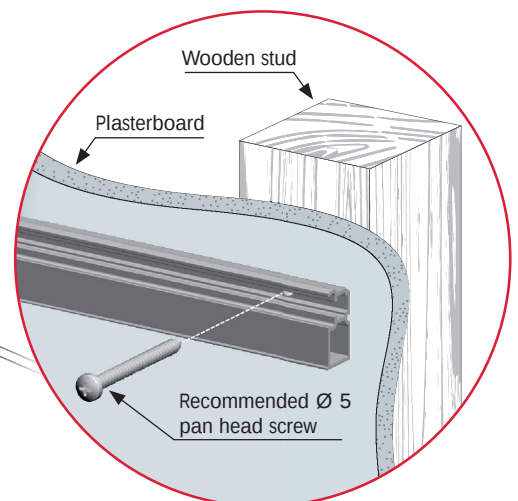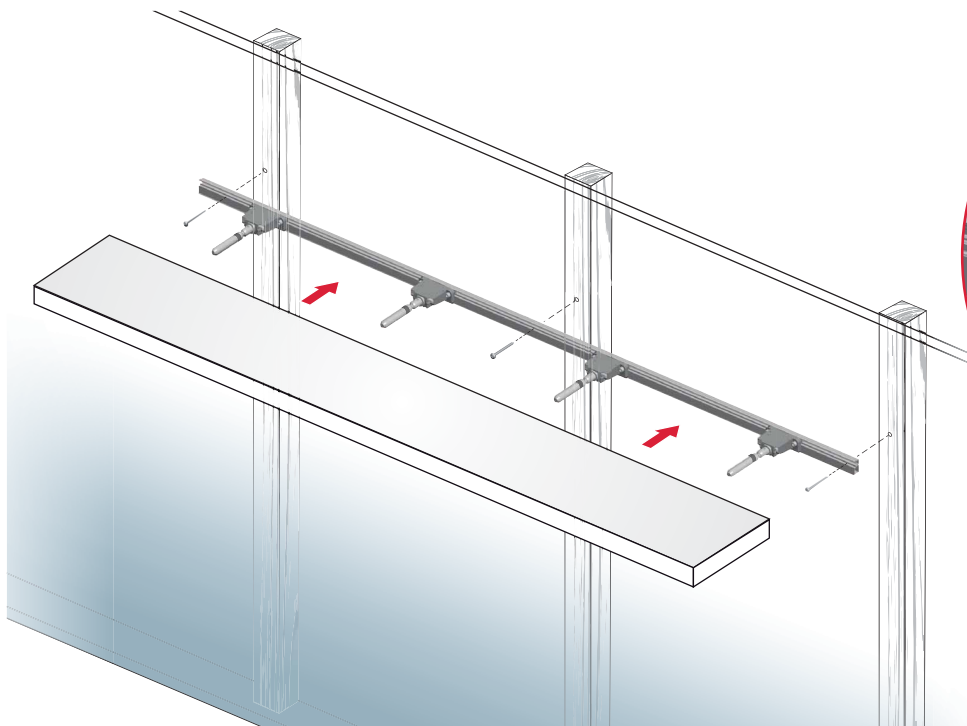



TRIADE PRO MAXI AND TRIADE PRO XXL ALUMINIUM PROFILE

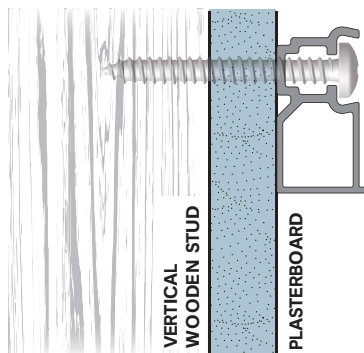



AL

= 12 pcs.





6912400000

Further profile lengths available on request.


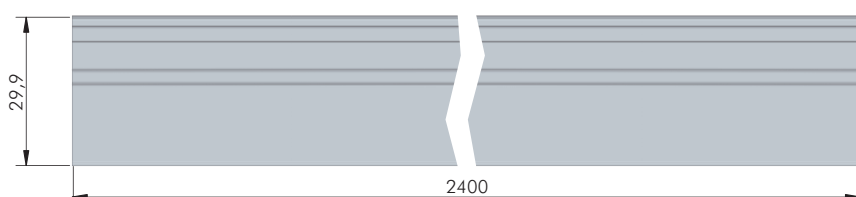


DRILLING PLAN FOR THE APPLICATION WITH TRIADE PRO MAXI

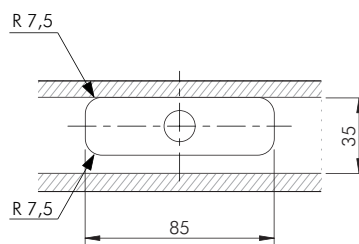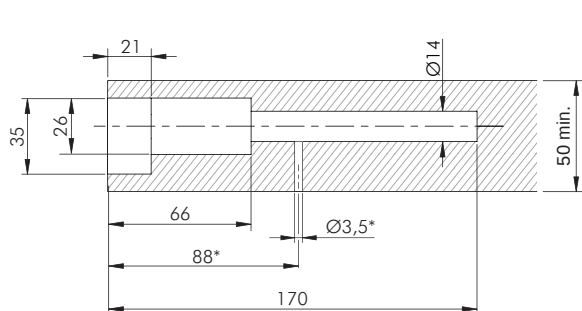


* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro Maxi section.

DRILLING PLAN FOR THE APPLICATION WITH TRIADE PRO XXL

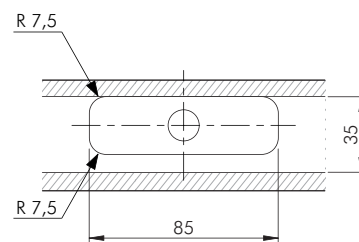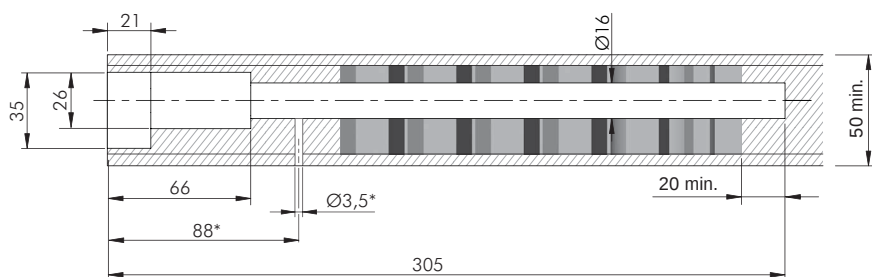

* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Pro XXL section.

ACCESSORY TO FIX ALL TRIADE PRO VERSIONS TO ALU PROFILES

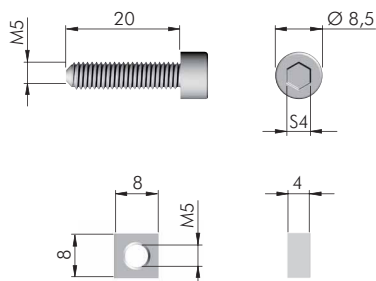

ST

= on request



C010001328



NOTE: Set of 4 x Square nuts and 4 x Socket-head cap screws.

DRILLING JIG FOR TRIADE PRO





50 mm MAX

GENERAL SPECIFICATIONS

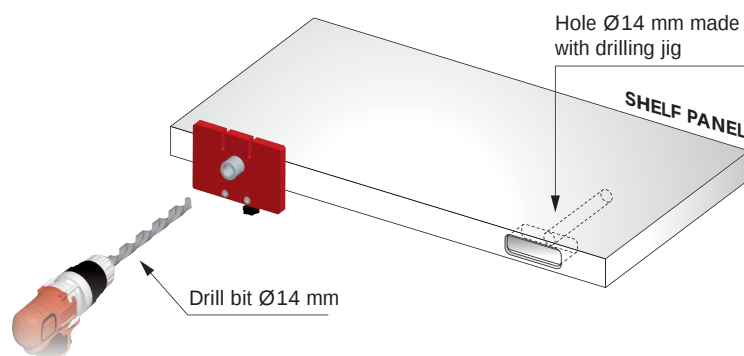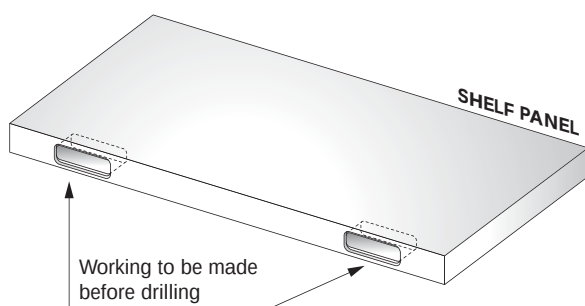

APPLICATION

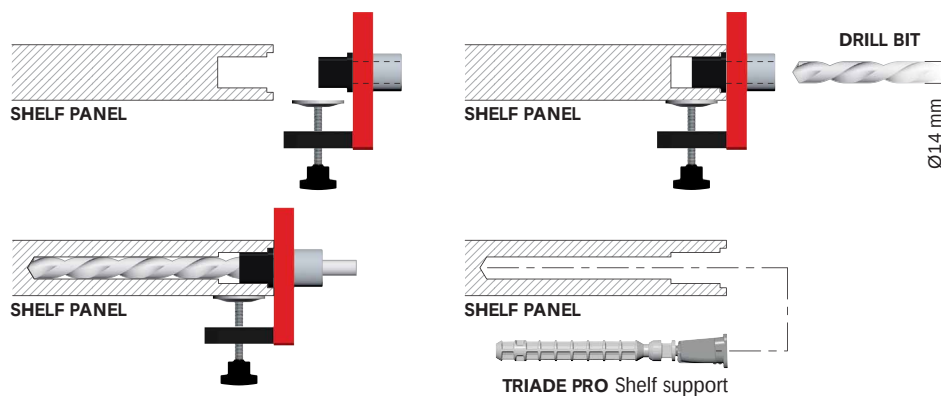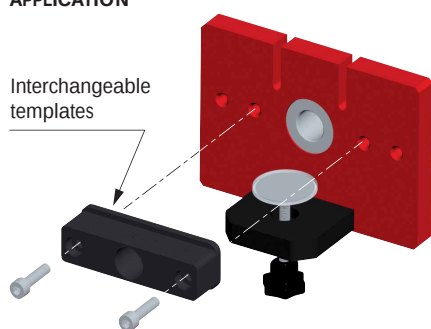

TEMPLATES AVAILABLE

TEMPLATE FOR TRIADE PRO MINI Part no. Y0JG013500	TEMPLATE FOR TRIADE PRO Part no. Y0JG013600	TEMPLATE FOR TRIADE PRO MAXI Part no. Y0JG013700	TEMPLATE FOR TRIADE PRO MINI AND TRIADE PRO ALUMINIUM PROFILE Part no. Y0JG013800	TEMPLATE FOR TRIADE PRO MAXI ALUMINIUM PROFILE Part no. Y0JG013900
Triade Pro Mini Triade Pro Mini and Bracket	Triade Pro Triade Pro and Bracket	Triade Pro Maxi Triade Pro Maxi and Bracket	Alu. profile for Triade Pro Mini and Triade Pro Triade Pro Mini Triade Pro	Alu. profile for Triade Pro Maxi Triade Pro Maxi





TRIADE PRO DRILLING JIG




TRIADE PRO DRILLING JIG TEMPLATES

TRIADE PRO MINI DRILLING PLAN

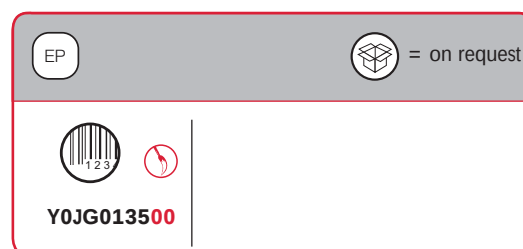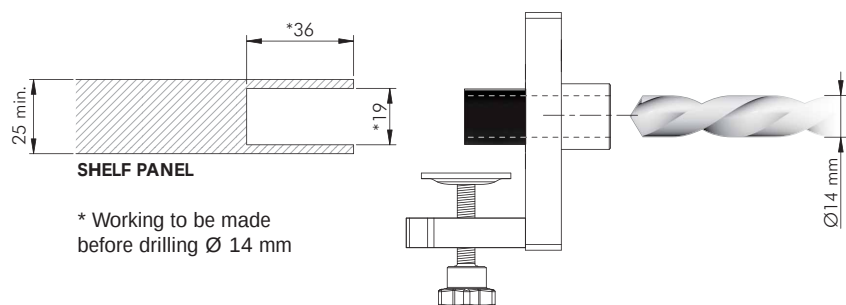


TRIADE PRO MINI AND BRACKET DRILLING PLAN

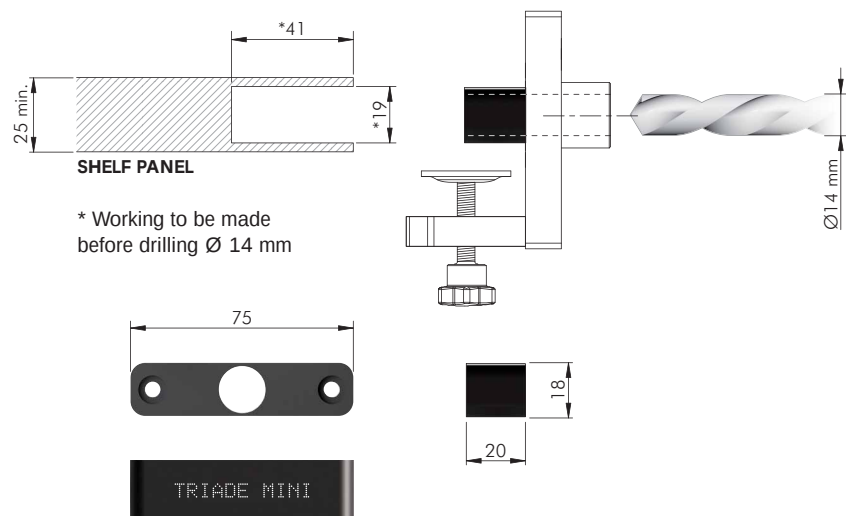


NOTE: The product code includes the fixing screws.



TRIADE PRO DRILLING PLAN

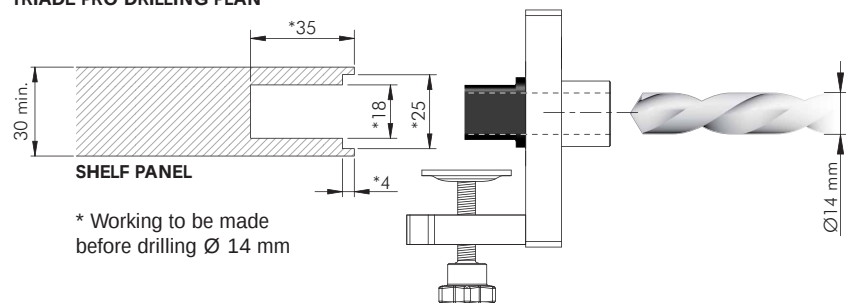

TRIADE PRO AND BRACKET DRILLING PLAN

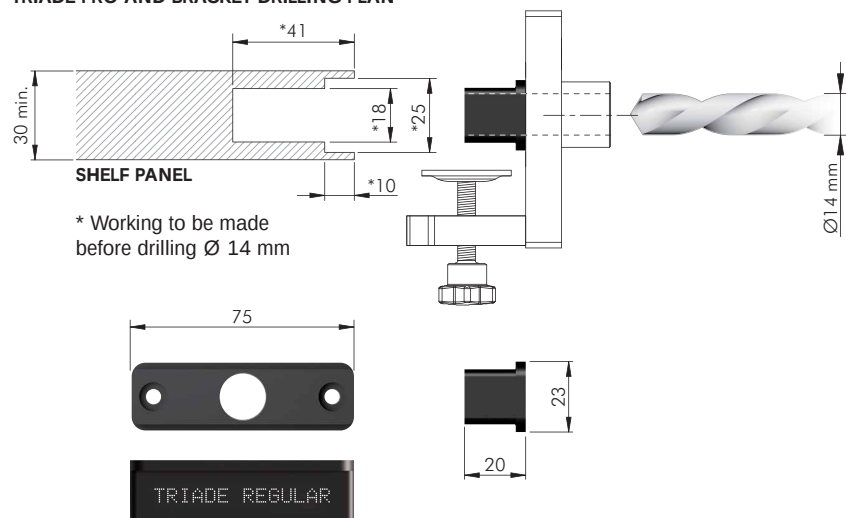

EP

 = on request




Y0JG013600


NOTE: The product code includes the fixing screws.



TRIADE PRO MAXI DRILLING PLAN

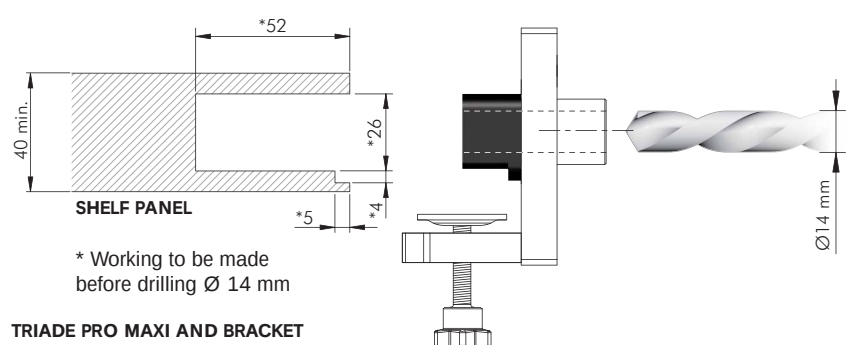

TRIADE PRO MAXI AND BRACKET DRILLING PLAN

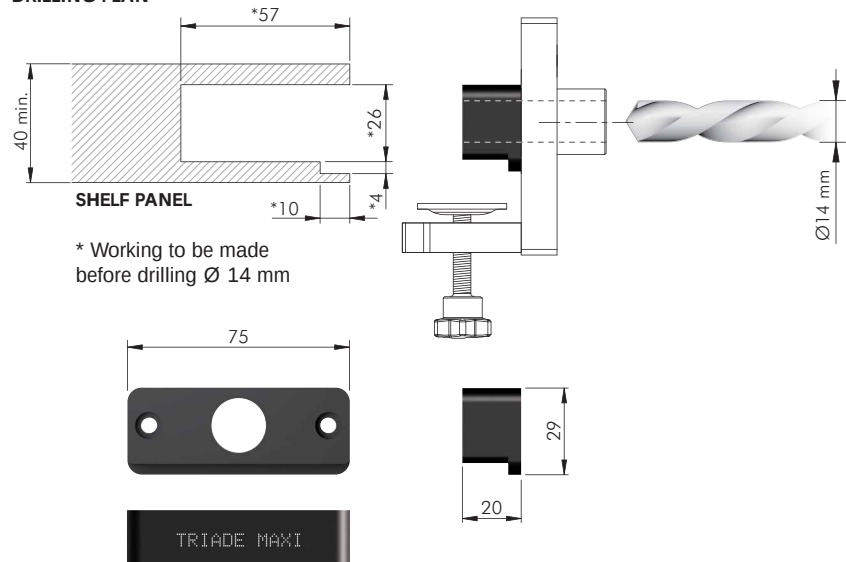

EP

 = on request




Y0JG013700

NOTE: The product code includes the fixing screws.










TRIADE PRO MINI WITH ALU PROFILE DRILLING PLAN

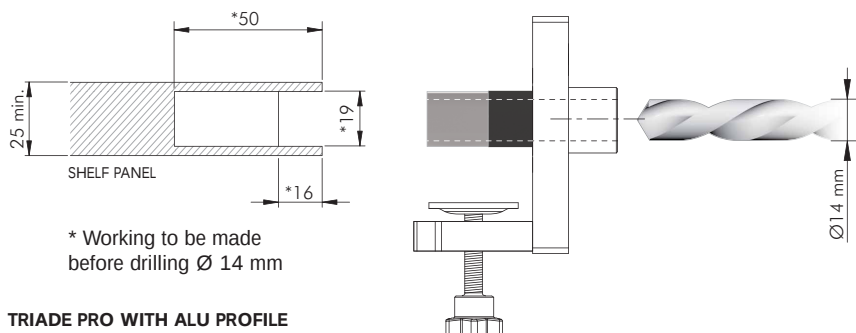




TRIADE PRO WITH ALU PROFILE DRILLING PLAN

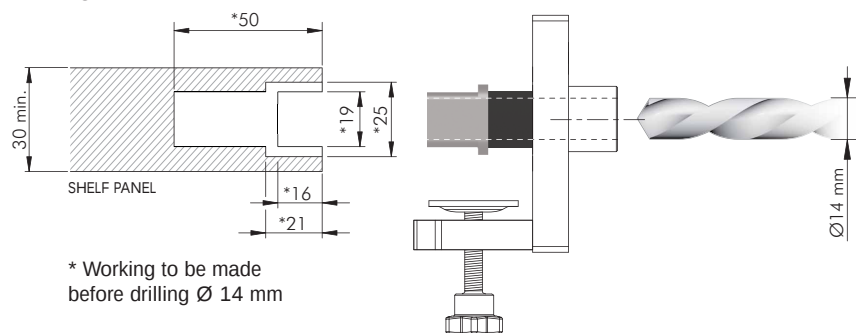


ALUMINIUM PROFILE TRIADE MINI TRIADE REGULAR

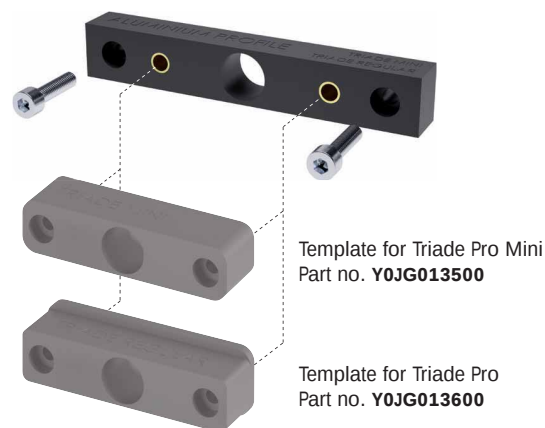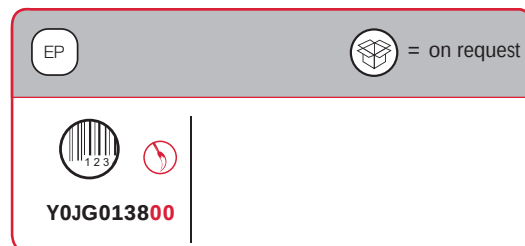



TRIADE PRO MAXI WITH ALU PROFILE DRILLING PLAN

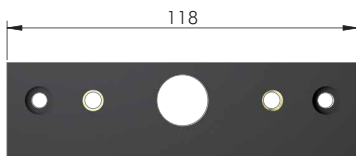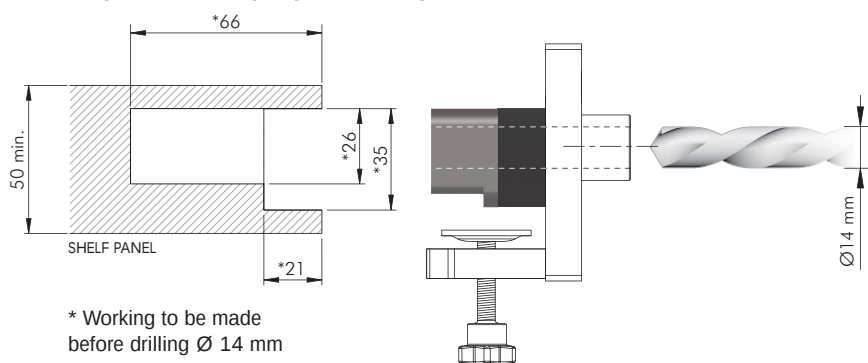

ALUMINIUM PROFILE TRIADE MAXI

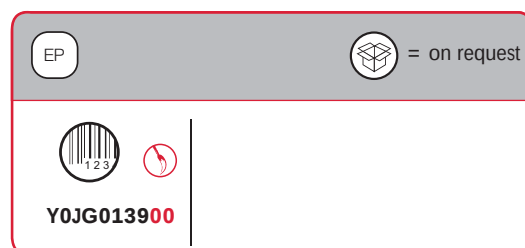

DRILL BIT

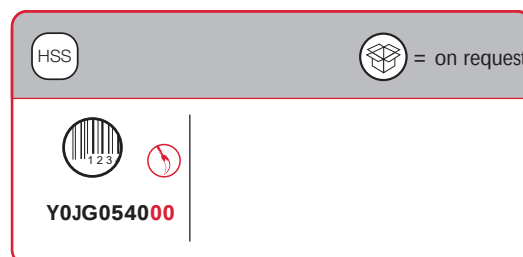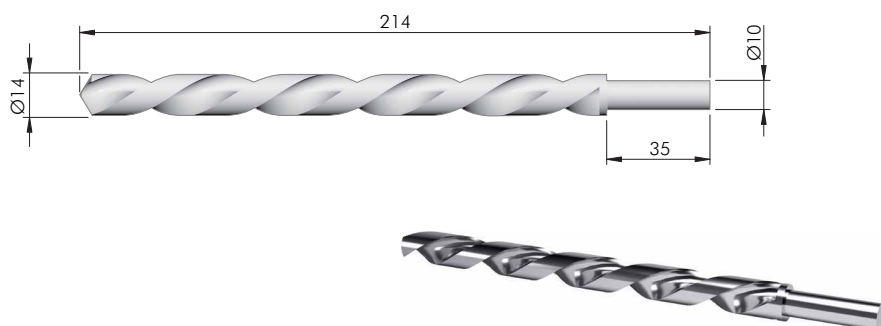

NOTE: For drilling jig we recommend to use precision-ground steel drill bit HSS-G.

COMPLETE KIT DRILLING JIG FOR TRIADE PRO

CONTENT OF THE CASE:

Part no.	Part no.
Y0JG0130RO	Y0JG0133RO
Y0JG013500	Y0JG055000
Y0JG013600	Y0JG054000
Y0JG013700	Y0JG054100
Y0JG013800	
Y0JG013900	







TRIADE PRO DRILLING JIG INSERT FOR SECURITY LOCKING





GENERAL SPECIFICATIONS

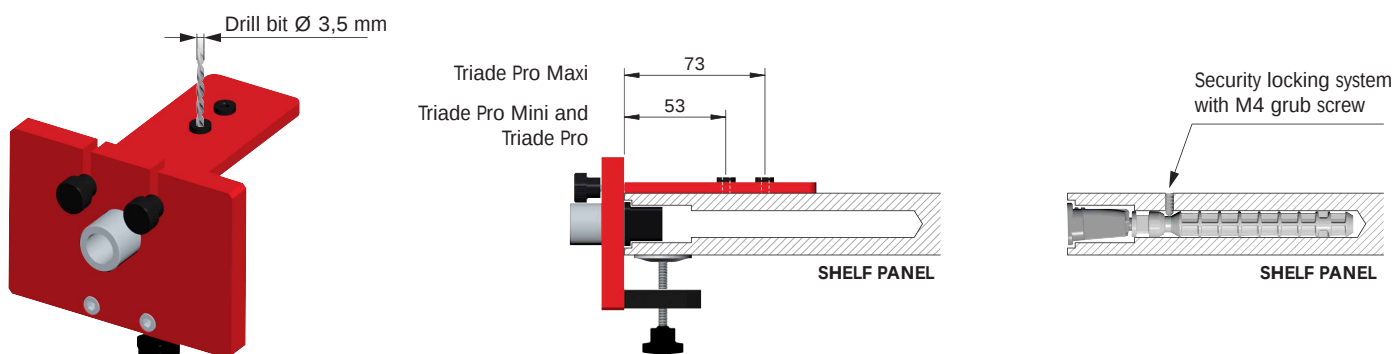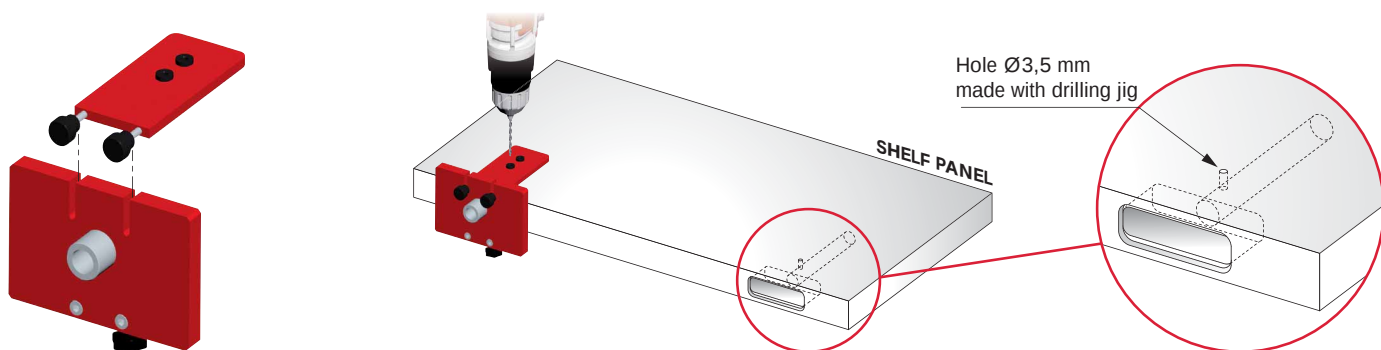

SPACERS AVAILABLE



SPACER FOR TRIADE PRO WALL BRACKETS

Part no. Y0JG054900



SPACER FOR TRIADE PRO ALUMINIUM PROFILES





Part no. Y0JG055000



DRILLING JIG INSERT FOR SECURITY LOCKING





SPACERS FOR SECURITY LOCKING

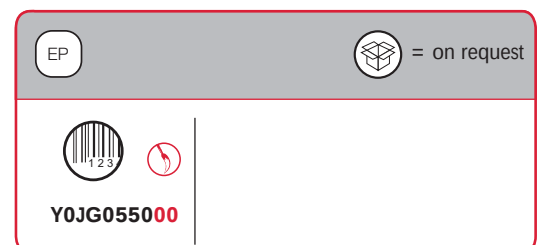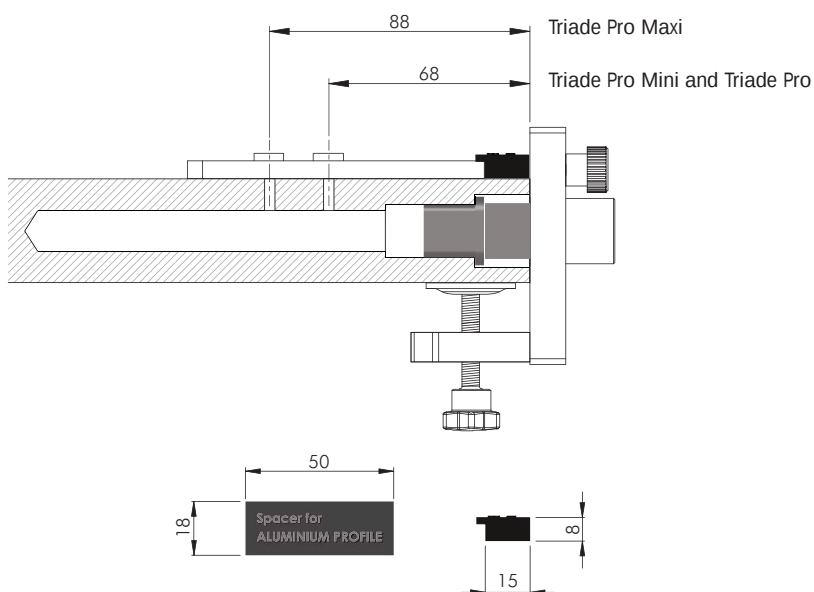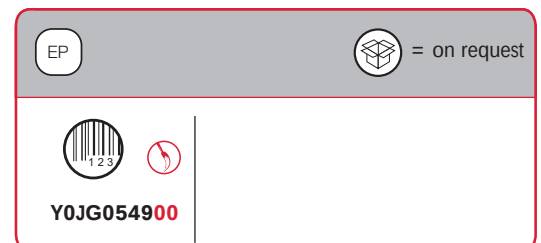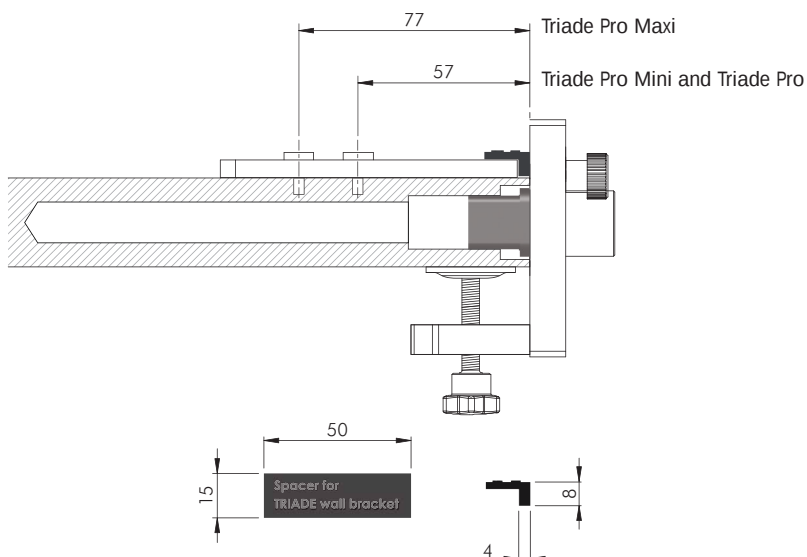



DRILL BIT

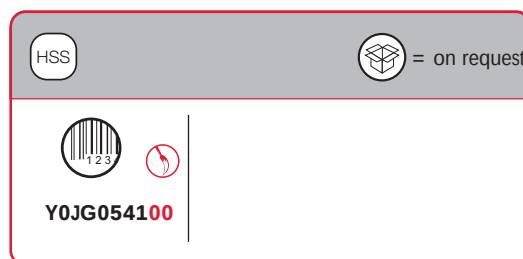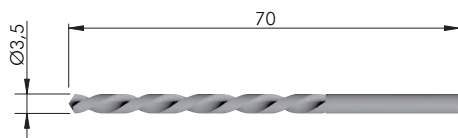


NOTE: For drilling jig we recommend to use precision-ground steel drill bit HSS-G.

COMPLETE SET DRILLING JIG FOR TRIADE PRO

CONTENT OF THE CASE:

Part no.	Part no.
Y0JG0130RO	Y0JG0133RO
Y0JG013500	Y0JG055000
Y0JG013600	Y0JG054000
Y0JG013700	Y0JG054100
Y0JG013800	
Y0JG013900	



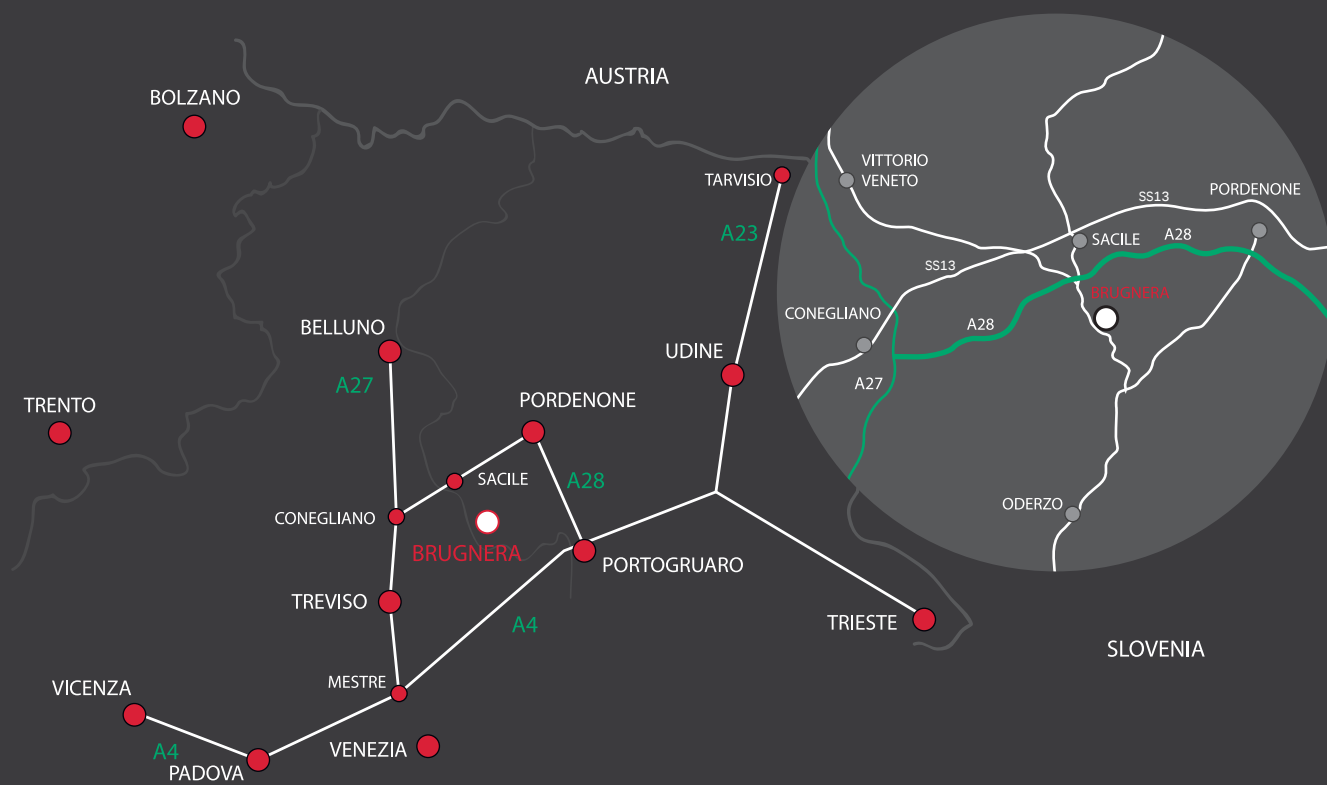

www.italianaferramenta.it