

LAMP HEAVY DUTY SOFT-DOWN STAY HDS-30

Latest
Info

Opening Direction	Features	Door Material	Maximum Door Moment
	OPEN With Catch	Wood	13.7~29.4 N·m/2pcs
	CLOSE Soft-down With Catch		

- For upward-opening flap doors.
- Built in damper to prevent slamming during closing.
- Built in catch holds flap closed.
- Can also be used with concealed, piano, or butt hinges.
- Use in pairs.

INSTRUCTION SCREW

Applicable Range

Torque	Model	Qty
13.7 - 19.5 N·m	K	1 pair
19.6 - 24.4 N·m	M	1 pair
24.5 - 29.4 N·m	H	1 pair

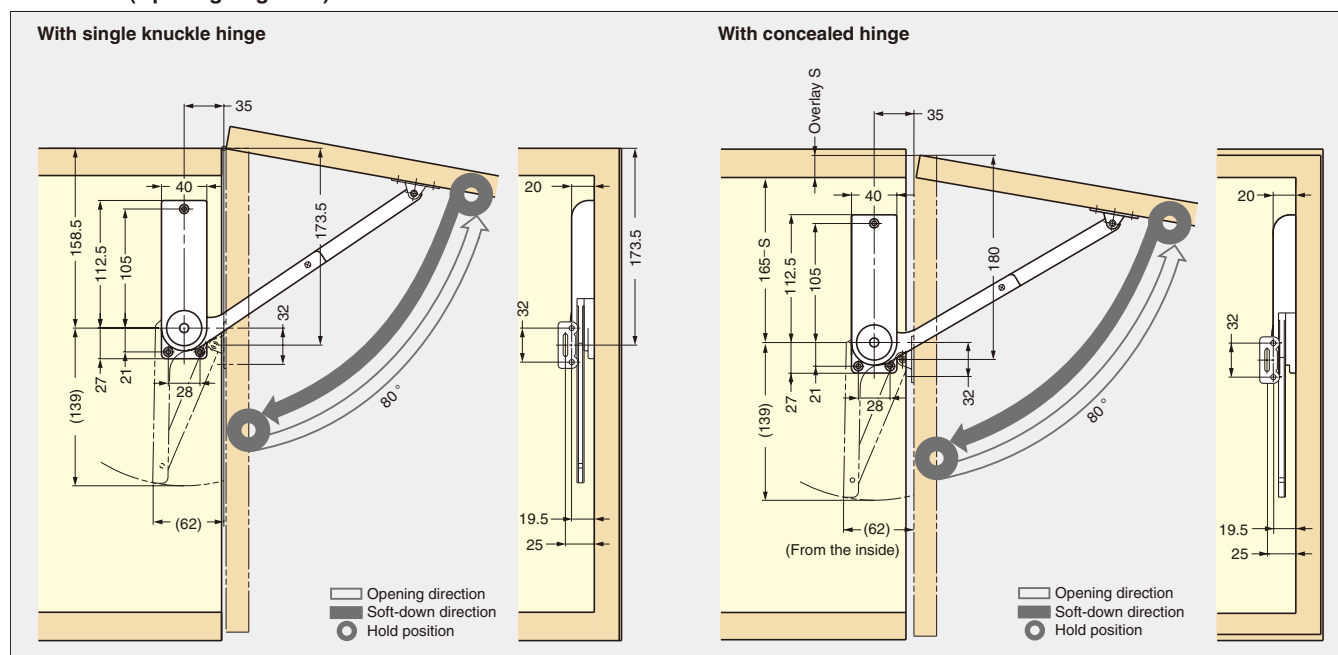
Parts Included

- Mounting plate
- Binding head tapping screw 3.5×15



Damper Stay

Installation (Opening Angle 80°)

TOP-
OPENINGUPWARD-
OPENINGDOWNWARD-
OPENINGBOTTOM-
OPENING

LIFT-UP

LIFT-DOWN

UP & OVER

BIFOLDING

INSET
RECEDINGOVER THE
TOPSWING
DOOR

Item Code	Item Name	Type	Material	Finish/Colour	Model	Torque Moment/pair	Weight	Carton
180-104-079	HDS-30KL-BL	Left	ABS/Steel	Nickel/Black	K	13.7 - 19.5 N·m (140 - 199 kgf·cm)	276 g	40 pcs
180-104-078	HDS-30KR-BL	Right	ABS/Steel	Nickel/Black	K		276 g	40 pcs
180-109-271	HDS-30KL-WT	Left	ABS/Steel	Nickel/White	K		276 g	40 pcs
180-109-270	HDS-30KR-WT	Right	ABS/Steel	Nickel/White	K		276 g	40 pcs
180-104-081	HDS-30ML-BL	Left	ABS/Steel	Nickel/Black	M	19.6 - 24.4 N·m (200 - 249 kgf·cm)	294 g	40 pcs
180-104-080	HDS-30MR-BL	Right	ABS/Steel	Nickel/Black	M		294 g	40 pcs
180-109-273	HDS-30ML-WT	Left	ABS/Steel	Nickel/White	M		294 g	40 pcs
180-109-272	HDS-30MR-WT	Right	ABS/Steel	Nickel/White	M		294 g	40 pcs
180-104-083	HDS-30HL-BL	Left	ABS/Steel	Nickel/Black	H	24.5 - 29.4 N·m (250 - 300 kgf·cm)	300 g	40 pcs
180-104-082	HDS-30HR-BL	Right	ABS/Steel	Nickel/Black	H		300 g	40 pcs
180-109-275	HDS-30HL-WT	Left	ABS/Steel	Nickel/White	H		300 g	40 pcs
180-109-274	HDS-30HR-WT	Right	ABS/Steel	Nickel/White	H		300 g	40 pcs