


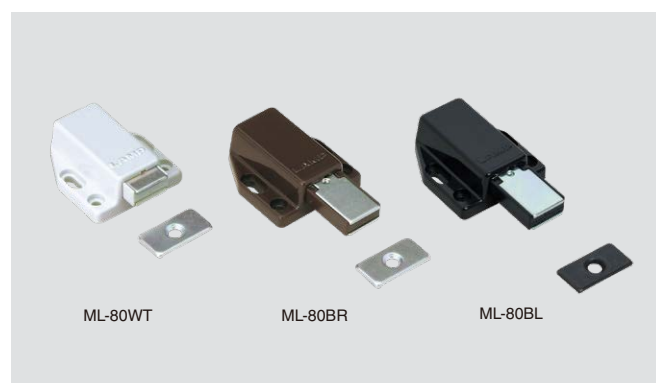

- The rotary cam mechanism provides greater durability compared to traditional spring mechanisms.
- Eliminates the need for a handle on doors; simply push to open or close.



SCREW

Remarks

- For overlay doors, make a 3.5 mm gap between door and cabinet frame.
- For large doors, please use the ML-120 (P.342) or ML-ZN80 (P.343) instead.
- Black colour version also available. For further details, please contact local representatives.

Parts Included

- Round head wood screw 3.1x13, Countersunk head wood screw 2.7x13

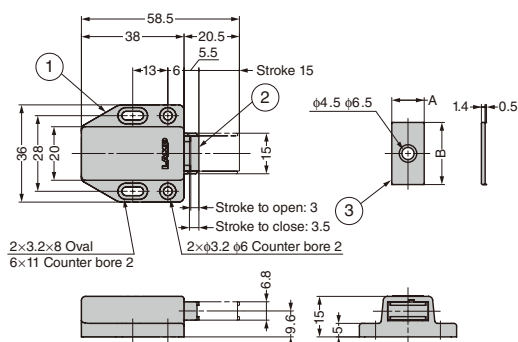

To ensure a push-in allowance of 3.5mm or above in the latch part, please leave a clearance C at the side board.

No.	Part Name	Material	Finish/Colour
①	Body	ABS	Brown, White, Black
②	Yoke	Steel (SPCC)	Coloured Zinc Chromate (trivalent)
③	Counter Plate	Steel (SPCC)	-Brown/white: Coloured Zinc Chromate (trivalent) -Black: Copper Plating

Item Code	Item Name	Colour	A	B	Magnetic Force N	Magnetic Force kgf	Weight	Box	Carton
140-050-270	ML-80BR	Brown	12	23	15.7 N	1.6 kgf	22 g	20 pcs	400 pcs
140-050-271	ML-80WT	White	12	23	15.7 N	1.6 kgf	22 g	20 pcs	400 pcs
140-050-013	ML-80BL	Black	11.5	22.5	15.7 N	1.6 kgf	22 g	20 pcs	400 pcs

SELECTION GUIDE

TOUCH LATCHES

MAGNETIC
CATCHES

KNUCKLE/
 TENSION
 CATCHES

PUSH
KNOB
LATCHES

LEVER LATCHES

DRAW
LATCHESSLIDE/
BARREL
BOLTS